

Bodecker
B R E W E D®



...Simply consistent,
Consistently simple...

CLOSING THE CYCLE:

THE ALUMINUM RECYCLING PROCESS

THE GLOBAL RECYCLING

Aluminum can be recycled over and over again without loss of properties. The high value of aluminum scrap is a key incentive and major economic incentive

Aluminum has been recycled since the early twentieth century, and the process is considered part of the natural life-cycle of metal. The initial reasoning for recycling were commercial and environmental, since the 95% energy saving – (coupled with production of the metal through recycling) - is economically sound.

With today's technology, aluminum and its alloys can be melted and re-casted indefinitely, producing metal with the same properties as primary aluminum. This is why recycled aluminum retains the highest value in the conventional recycle chain, which drives collection for further recycling. Virtually 100% of the scrap arising from the manufacture and production of aluminum products is recycled.



RECYCLING PROCESSES



CLOSED-LOOP ALUMINUM RECYCLING

The industry recycles all the aluminum scrap it can obtain from end-of-life products and aluminum by-products. New scrap is collected almost in its entirety, as collection is in the hands of the aluminum industry. The collection of aluminum at end-of-life depends, however, on consumer initiative to collect aluminum for recycling, as well as the co-operation of industry, legislators and local communities to set up efficient collection systems.



ALUMINUM LIFE CYCLE



RECYCLING PROCESSES



SHREDDING ALUMINUM

Aluminum arrives either in bales or loose and flattened, and it's shredded into small particles in a 1000 horsepower shredder with a capacity of 15 tones per hour (based on recycling plants designed in 1990's). The shreds are then passed through a double magnetic drum separator to remove steel and other foreign materials (such as coffee), which are a contaminant to the process.

REMOVING FOREIGN MATERIALS FROM THE ALUMINUM

Lacquer, coffee grounds and other foreign materials from the branded and decorated aluminum is removed by blowing hot air (around 500°C) through the shreds in a decoater, on a slowly-moving insulated conveyor. The hot exhaust from the de-coater is combusted in an after-burner, and the exhaust from the after-burner passes over a heat exchanger, which heats the fresh air going into the decoater. By recycling hot air in this way, the need for a separate fuel source for this part of the process is removed, maximizing energy efficiency.

MELTING THE ALUMINUM

The hot, shredded, decoated aluminum is fed into one of the two 90-tonne sidewall furnaces, which contain submerged stirrers that create a vortex in the pool of molten aluminum and drag the shreds quickly down into the melt. This process achieves rapid melting rates and high yields.

The furnaces have state of the art regenerative burners and a burner management system to reduce the amount of energy used. The jet pump stirrers alternate between applying positive and negative pressures, blowing out and sucking in the metal to achieve rapid melt and even temperatures.

Dross, which is a by-product of melting aluminum, is removed periodically from the furnaces, and cooled under a blanket of argon to prevent oxidation. This increases the amount of aluminum that can be recovered from the dross.

The now-molten metal is transferred into the 90-tonne holding furnace, where accurate temperature control is achieved, the alloy composition is checked and the metal is treated to remove non-metallic particles before casting.



RECYCLING
PROCESSES



CASTING THE INGOTS

Ingots are cast by tilting the holding furnace and pouring the molten metal - via a two-stage process to remove any remaining minute non-metallic particles and gases - into a vertical casting unit. Chemical composition and metal cleanliness are then tested on each cast. As the metal flows into the mould, it is chilled by jets of cool water being pumped around the mould, and a solidified outer shell is formed. The base of the mould begins to lower hydraulically, the metal continues to flow into the mould and the shell is now directly cooled by a secondary water curtain as the ingot grows to a length of up to 9m. The ingot solidifies gradually during the casting process, which takes approximately three hours. The ingots, are then shipped on to a mill for rolling into the sheet from which manufactures subsequently produce new products - and the whole process begins again.



RECYCLING PROCESSES



HOW MUCH ENERGY IS SAVED BY ALUMINUM RECYCLING?

The energy required to produce one tone of recycled aluminum ingots from **clean scrap can be as little as 5% of the energy needed to produce one tone of primary aluminum.** However, aluminum scrap is frequently mixed with other materials and additional energy may be required to separate the aluminum and protect the environment from the impact of these materials. Further energy needs relating to both the primary and recycled aluminum production chain are dependent on the technology applied and the geographical location, and therefore on local energy efficiency and transportation distances. Hence, it is not possible to calculate a universal value for energy savings.

WHAT HAPPENS TO THE RESIDUES GENERATED DURING THE RECYCLING PROCESS?

Aluminum salt slag is a mixture of salts, aluminum oxide, metallic aluminum and impurities, extracted from aluminum scrap during melting. It is the typical residue left behind when aluminum scrap is melted in a rotary furnace. Rotary furnaces are commonly employed for aluminum scrap containing foreign materials. Depending on the kind of rotary furnace used and the type of scrap being melted, anything up to 500 kg of salt slag can be generated in the production of one tone of aluminum metal. Salt slag, which used to be land filled, is now recycled. The salt that is applied during melting can be completely recovered and used again for the same purpose by the refiner. The metallic aluminum is also recovered and utilized to produce aluminum alloys.

WHAT HAPPENS TO THE EMISSIONS GENERATED DURING PROCESS?

The most significant emissions resulting from the aluminum recycling process are emissions released into the air. These include dust and smoke, metal compounds, organic materials, nitrogen oxides, sulphur dioxides and chlorides. State-of-the-art technology is used to extract fumes and other emissions and to reduce fugitive emissions. The limits for dioxin emissions are very strict, in the range of $<0.1 - 1 \text{ ng/Nm}^3$. North American and European refiners and remelters are equipped with state-of-the-art air filter equipment to clean exhaust gases of dust, acidic gases (HCl, HF, SO₂), volatile organic carbon, dioxins, and furans.



RECYCLING PROCESSES





THE GLOBAL RECYCLING

Aluminum can be recycled over and over again without loss of properties. The high value of aluminum scrap is a key incentive and major economic incentive.

Aluminum recycling benefits present and future generations by conserving energy and other natural resources. It saves up to 95% of the energy required for primary aluminum production, thereby avoiding corresponding emissions.

Global aluminum recycling rates are high, approximately 90% for transport and construction applications and about 60% for beverage cans.

ALUMINUM TRACKING THROUGHOUT ITS LIFE CYCLE

The aluminum industry, in collaboration with various universities, is currently designing a model to track aluminum throughout its life cycle from mining to use to recycling. More than 90 processes (including sub-processes) and 300 aluminum flows will be investigated. The main objective of the study is to quantify the aluminum collection rate, as well as the metal losses incurred during the treatment and melting of scrap. This will help the industry to understand more fully, and continue to improve, the diversity of processes required for recycled aluminum production. The model is not static but will be regularly updated to ensure that technological, market and legislative changes are incorporated as they arise. This represents yet another significant step by the aluminum industry in its drive for, and commitment to, continued progress.




RECYCLING PROCESSES



In this Process, the aluminum is smelted, shredded, and processed. Aluminum recycling saves 95% of the energy required to mine the same amount of raw material.



RECYCLING PROCESSES

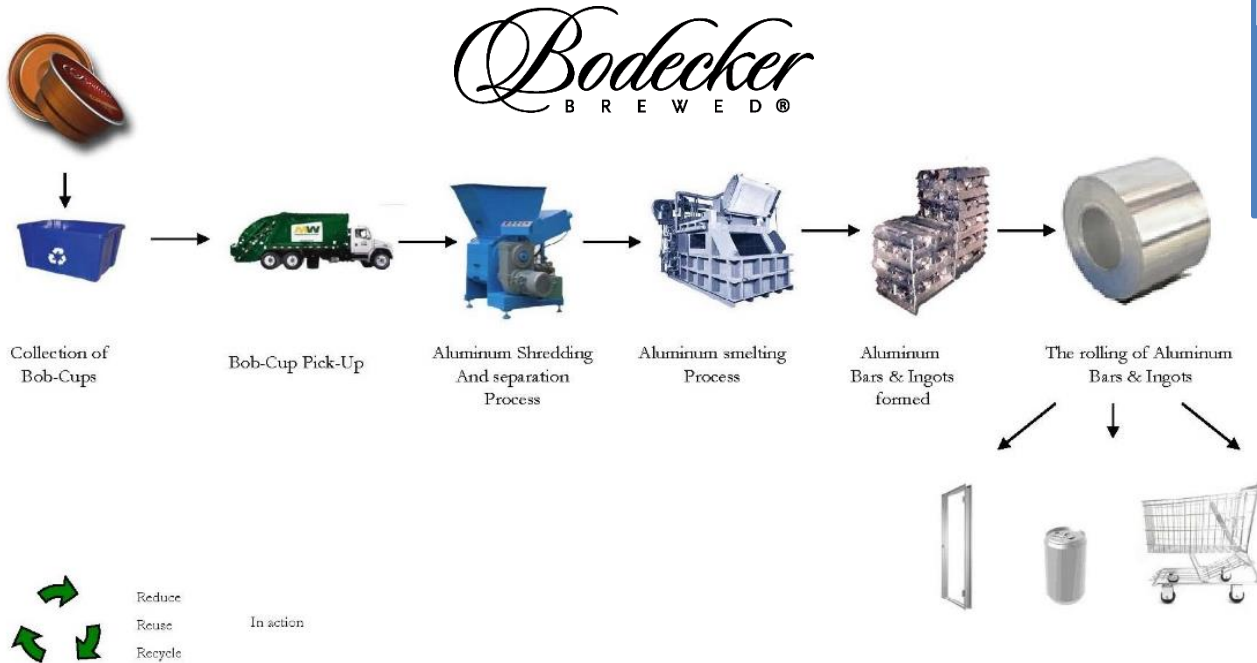



February 6, 2019

To whom it may concern,

Ram Iron and Metal Inc. is an environmental leader in the scrap metal industry and are always in pursuit of innovative solutions that will ultimately result in less waste and fewer landfills.

Further to your inquiry as to the recyclability of the **Bodecker Brewed Aluminum cartridge**:

After thorough review of this matter, we are pleased to confirm that Bodecker Brewed capsules meet the criteria of a recyclable product.

We would advise your customers to handle these cartridges as they would any other aluminum product, and our facility will accommodate the recycling.

We commend the efforts Bodecker Brewed and Mister Coffee contribute to, marketing products that are 100% recyclable.

Sincerely,

Andrew Racco
General Manager
Ram Iron & Metal Inc.
581 Rivermede Road
Concord, Ontario L4K 2G8
416-630-4545 Ext. 257

60 Ashwarren Road • Toronto, ON • M3J 1Z5 • Tel: 416.630.4545 • Fax: 416.630.5258 • TF: 1.877.660.1336



RECYCLING PROCESSES





Bodecker Capsules
Pounds Recycled to Raw Aluminum

	YEAR 2016	YEAR 2017	Total
Capsules	48,465	14,280	62,745
Pounds	216.70	63.85	281
Kilograms	98.50	29.02	128

TOTAL PODS (2017)	BODECKER SLEEVES	INDIVIDUAL SERVING
JAN 2016 - MAR 2016	875	13125
APR 2016 - JUN 2016	719	10785
JUL 2016-SEPT 2016	760	11400
OCT 2016-DEC 2016	877	13155
JAN 2017-MAR 2017	952	14280



RECYCLING REPORTS





Certificate Of Achievement





THANK YOU FOR CHOOSING BODECKER

Bodecker is currently the only hot beverage cartridge made from a fully recyclable material...aluminum.

We use a direct marketing program to minimize costs, these savings are passed on to our customer in the belief that you identify more with the environment than with a branded name.

The logic: save the planet.....save money

The result:

“Our products do not go to waste”

Bodecker – a product for socially conscious companies with a desire to save the environment.



Please Recycle

This bin is dedicated for recycling

Bodecker cartridges only.

